



GUARD DOG®

LOW PROFILE PROTECTORS

HEAVY DUTY LOW PROFILE

CABLE PROTECTORS

The widest variety of low profile, top-loading cable protectors in the industry!

Heavy duty GUARD DOG® Low Profile Cable Protectors are the most compact, top-loading cable protectors on the market. They provide a safe and easy crossing for vehicle and pedestrian traffic and are perfect for valuable electrical and delicate multi-media electronic cables. These low profile protectors with Dog-Bone connectors are available with standard ramps or with low angle ADA Compliant ramps. Multi-channel models allow cable/hose lines to be separated in their own protective channels while the low angle ramps allow effortless crossing. Ideal for stage, studio, and broadcast applications.

LOW PROFILE 1 CHANNEL OPTIONS

- Hinged lid for easy cable placement
- Patented 5-bar tread surface
- Safety warning symbols molded into lid
- Carrying handle recessed underneath
- Heavy duty "Dog-Bone" connectors to extend to any desired length



GUARD DOG® LOW PROFILE 1 CHANNEL CABLE PROTECTORS

MODEL	DESCRIPTION	A-LENGTH	B-WIDTH	C-HEIGHT	D-CHANNEL WIDTH	E-CHANNEL HEIGHT	WEIGHT	END VIEW
GD1X75-ST	1 Channel Protector w Standard Ramps	36 in. (914.4 mm)	10.81 in. (274.6 mm)	1.25 in. (31.8 mm)	2.25 in. (57.2 mm)	.75 in. (19 mm)	7.8 lbs. (3.54 kg)	
GD1X75-STRP	1 Channel Standard Ramps w Rubber Pads	36 in. (914.4 mm)	10.81 in. (274.6 mm)	1.25 in. (31.8 mm)	2.25 in. (57.2 mm)	.75 in. (19 mm)	7.8 lbs. (3.54 kg)	
GD1X75	1 Channel Protector w ADA Ramps	36 in. (914.4 mm)	27.25 in. (692.2 mm)	1.25 in. (31.8 mm)	2.25 in. (57.2 mm)	.75 in. (19 mm)	21.1 lbs. (9.55 kg)	

Protector Color: O/B = Orange Lid with Black Ramps • B/B = Black Lid with Black Ramps • O/BLU = Orange Lid with Blue Ramps (on ADA Ramp Models ONLY)

LOW PROFILE 2 CHANNEL OPTIONS

- Hinged lid for easy cable placement
- Patented 5-bar tread surface
- Safety warning symbols molded into lid
- Carrying handle recessed underneath
- Heavy duty "Dog-Bone" connectors to extend to any desired length



GUARD DOG® LOW PROFILE 2 CHANNEL CABLE PROTECTORS

MODEL	DESCRIPTION	A-LENGTH	B-WIDTH	C-HEIGHT	D-CHANNEL WIDTH	E-CHANNEL HEIGHT	WEIGHT	END VIEW
GD2X75-ST	2 Channel Protector w Standard Ramps	36 in. (914.4 mm)	11.94 in. (303.3 mm)	1.25 in. (31.8 mm)	1.5 in. (38 mm)	.75 in. (19 mm)	9.05 lbs. (4.1 kg)	
GD2X75-STRP	2 Channel Standard Ramps w Rubber Pads	36 in. (914.4 mm)	11.94 in. (303.3 mm)	1.25 in. (31.8 mm)	1.5 in. (38 mm)	.75 in. (19 mm)	9.05 lbs. (4.1 kg)	
GD2X75	2 Channel Protector w ADA Ramps	36 in. (914.4 mm)	28.38 in. (720.9 mm)	1.25 in. (31.8 mm)	1.5 in. (38 mm)	.75 in. (19 mm)	22.85 lbs. (10.36 kg)	

Protector Color: O/B = Orange Lid with Black Ramps • B/B = Black Lid with Black Ramps • O/BLU = Orange Lid with Blue Ramps (on ADA Ramp Models ONLY)

SPECIFICATION DATA

Material..... Polyurethane (UV stabilized)
 Operating Temp..... -40°F to 120°F (-40°C to 48°C)
 Hinge Pin Material..... Reinforced fiberglass
 Safety Symbols..... Per ANSI. Z535.3-1991

LOAD CAPACITY PER TIRE / AXLE

Channels	Max Load 70°F (21°C)
1 Standard....	13,000 lbs./Tire (5,896 kg) 26,000 lbs./Axle (11,792 kg)
1 ADA.....	23,000 lbs./Tire (10,432 kg) 46,000 lbs./Axle (20,864 kg)
2 Standard....	13,000 lbs./Tire (5,896 kg) 26,000 lbs./Axle (11,792 kg)
2 ADA.....	23,000 lbs./Tire (10,432 kg) 46,000 lbs./Axle (20,864 kg)



Safety Warning Symbols Molded into Lid



MORE MODELS ON REVERSE SIDE


Made in USA

FEATURES

- Available with or without ADA Compliant ramps
- 1, 2, 3, or 5 channel options
- Low profile design reduces trip hazards
- Hinged lid for easy cable placement

- Polyurethane construction
- High load-bearing capacity
- Satisfies state and federal regulatory agencies
- Modular interlocking design is easy to setup, disassemble and store

GRD-LP HND:v3 3-10

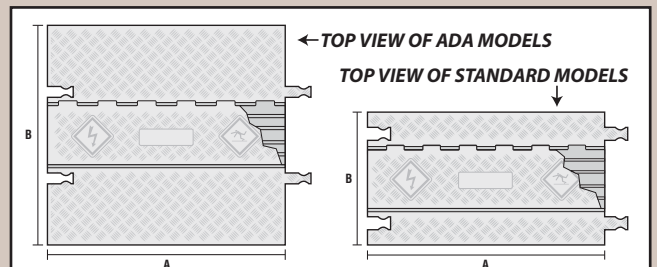

CHECKERS®
INDUSTRIAL SAFETY PRODUCTS, INC.

The most trusted name in cable protection!

www.cableprotector.com • 800-438-9336

PH: 720-890-1187 • FAX: 720-890-1191 • 620 COMPTON ST, BROOMFIELD, CO 80020