



ALL-TERRAIN URETHANE WHEEL CHOCKS


ROADBLOCKS™ All-Terrain Urethane Wheel Chocks are specifically designed for use on fire equipment. They comply with NFPA 1901-03 and meet SAE-J348 standard for up to 32 inch and up to 44 inch wheel diameters. These tough, damage resistant, polyurethane chocks are resistant to oils, fuels, and solvents. They also feature high strength aluminum base plates with posi-grip traction cleats or anti-slip rubber traction pads. For added safety and convenience, Checkers incorporates a molded carrying handle and high visibility colors for easy identification.

NFPA 1901-03 STANDARDS REQUIRE WHEEL CHOCKS TO BE MOUNTED ON FIRE APPARATUS BEFORE BEING PLACED INTO SERVICE.

SAE-J348 STANDARD PRESENTS DESIGN, MANUFACTURER, AND TESTING CRITERIA FOR WHEEL CHOCKS.

2512 SERIES - Wheel Chocks comply with NFPA 1901-03 and meet SAE-J348 Standard for up to 32 in. (810 mm) wheel diameter.

MODEL	BASE DESIGN	COLOR	A LENGTH	B WIDTH	C HEIGHT	WEIGHT
AT2512-AC-Y	Aluminum Cleat	Yellow	15.5 in. (394 mm)	8.5 in. (216 mm)	8.25 in. (210 mm)	9 lbs. (4.1 kg)
AT2512-AC-R	Aluminum Cleat	Red	15.5 in. (394 mm)	8.5 in. (216 mm)	8.25 in. (210 mm)	9 lbs. (4.1 kg)
AT2512-RP-Y	Rubber Pad	Yellow	15.5 in. (394 mm)	8.5 in. (216 mm)	8.25 in. (210 mm)	8.4 lbs. (3.8 kg)
AT2512-RP-R	Rubber Pad	Red	15.5 in. (394 mm)	8.5 in. (216 mm)	8.25 in. (210 mm)	8.4 lbs. (3.8 kg)

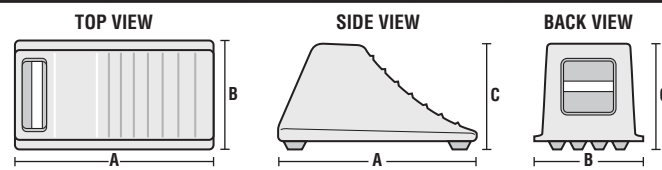


MOUNTING BRACKETS FOR 2512 SERIES

MODEL	DESCRIPTION	COATING	WEIGHT
AT2512VM	Vertical Mounting Bracket for Model 2512 Chock <i>Mounting Hardware NOT Included.</i>	Zinc Plated	4 lbs. (1.8 kg)
AT2512HM	Horizontal Mounting Bracket for Model 2512 Chock <i>Mounting Hardware Included.</i>	Zinc Plated	4.25 lbs. (1.9 kg)

Horizontal bracket may be mounted under the vehicle or in an apparatus compartment.

2514 SERIES - Wheel Chocks comply with NFPA 1901-03 and meet SAE-J348 Standard for up to 44 in. (1120 mm) wheel diameter.

MODEL	BASE DESIGN	COLOR	A LENGTH	B WIDTH	C HEIGHT	WEIGHT
AT2514-AC-Y	Aluminum Cleat	Yellow	21 in. (533 mm)	11.25 in. (286 mm)	12.25 in. (311 mm)	22 lbs. (10 kg)
AT2514-AC-R	Aluminum Cleat	Red	21 in. (533 mm)	11.25 in. (286 mm)	12.25 in. (311 mm)	22 lbs. (10 kg)
AT2514-RP-Y	Rubber Pad	Yellow	21 in. (533 mm)	11.25 in. (286 mm)	12.25 in. (311 mm)	23 lbs. (10.4 kg)
AT2514-RP-R	Rubber Pad	Red	21 in. (533 mm)	11.25 in. (286 mm)	12.25 in. (311 mm)	23 lbs. (10.4 kg)

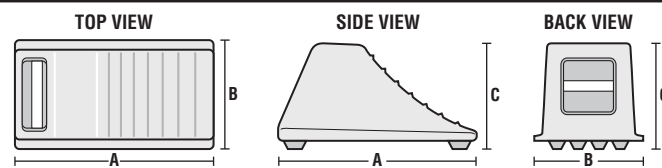

MOUNTING BRACKETS FOR 2514 SERIES

MODEL	DESCRIPTION	COATING	WEIGHT
AT2514VM	Vertical Mounting Bracket for Model 2514 Chock <i>Mounting Hardware NOT Included.</i>	Zinc Plated	4.75 lbs. (2.2 kg)
AT2514HM	Horizontal Mounting Bracket for Model 2514 Chock <i>Mounting Hardware Included.</i>	Zinc Plated	5 lbs. (2.3 kg)

Horizontal bracket should be mounted in an apparatus compartment and not under the vehicle.

ALL TERRAIN SERIES

- Complies with SAE-J348 and Current NFPA 1901-03 Standard
- Third Party Tested for Compliance
- Tough Polyurethane Construction
- Resistant to Oils, Fuels and Solvents
- Aluminum Traction Cleats or Rubber Pads
- Recessed Carrying Handle
- Safety Color Visibility

WARNING!

Please refer to Wheel Chock User Guidelines on Page 6.



Available in red or yellow with aluminum cleats or rubber pads



Available in red or yellow with aluminum cleats or rubber pads



VERTICAL BRACKET

HORIZONTAL BRACKET

