



DIAMONDBACK®
CABLE & HOSE BRIDGE SYSTEMS

MULTIPLE TUNNEL CABLE & HOSE BRIDGE SYSTEMS

DIAMONDBACK® Multiple Tunnel Modular Cable and Hose Bridge Systems provide protection for valuable cable and hose lines while ensuring a method of safe passage for vehicles. They replace wooden and metal fabricated ramps. High density, all-weather urethane construction protects from damage by physical pressure and reduces cable and hose maintenance and replacement costs. DIAMONDBACK® Modular Bridge Systems can be used to protect multiple parallel lines up to 6 inches in diameter. The lightweight, modular design of interlocking 16 inch wide sections provides multi-length flexibility. DIAMONDBACK® Cable and Hose Bridge Systems are intended for temporary installations only.

U.S. PATENT No: 6,878,881

PROTECT MULTIPLE CABLES & HOSES UP TO 6 INCHES IN DIAMETER

FEATURES

- Polyurethane construction is abrasion, impact and weather resistant with high load bearing capacity
- Multiple tunnel choices to accommodate multiple fully charged hose lines and cables of various diameters
- Diamond-plate tread surface increases traction
- Yellow caution color for high visibility
- Modular interlocking design is lightweight, easy to transport, setup, breakdown and store
- Built-in handholds allow for handling with ease and double as attachment points for mounting brackets


CREATE A CUSTOM BRIDGE SYSTEM BY ORDERING TUNNEL CONNECTORS & INDIVIDUAL COMPONENTS SEPARATELY

MODEL	DESCRIPTION	WEIGHT	
3" TUNNEL OPTIONS			
UHB2025T (Each)	Tunnel Only for up to 3 in. Lines	15 lbs. (6.8 kg)	
UHB2025R (Pair)	Ramps Only for UHB2025T Tunnel	18 lbs. (8.2 kg)	
UHB2025TC (Each)	Tunnel Connector Only for UHB2025T Tunnel	11 lbs. (5 kg)	


3.5" TUNNEL OPTIONS			
UHB3035T (Each)	Tunnel Only for up to 3.5 in. Lines	17 lbs. (7.7 kg)	
UHB3035R (Pair)	Ramps Only for UHB3035T Tunnel	22 lbs. (10 kg)	
UHB3035TC (Each)	Tunnel Connector Only for UHB3035T Tunnel	16 lbs. (7.3 kg)	

4.5" TUNNEL OPTIONS			
UHB4045T (Each)	Tunnel Only for up to 4.5 in. Lines	21 lbs. (9.5 kg)	
UHB4045R (Pair)	Ramps Only for UHB4045T Tunnel	30 lbs. (13.6 kg)	
UHB4045TC (Each)	Tunnel Connector Only for UHB4045T Tunnel	21 lbs. (9.5 kg)	


6.5" TUNNEL OPTIONS			
UHB5060T (Each)	Tunnel Only for up to 6.5 in. Lines	32 lbs. (14.5 kg)	
UHB5060R (Pair)	Ramps Only for UHB5060T Tunnel	58 lbs. (26.3 kg)	
UHB5060TC (Each)	Tunnel Connector Only for UHB5060T Tunnel	26 lbs. (11.8 kg)	



Two tunnel system on location

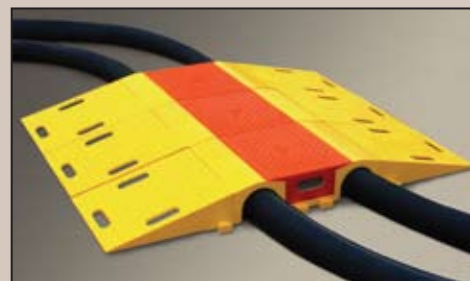

Two tunnel system

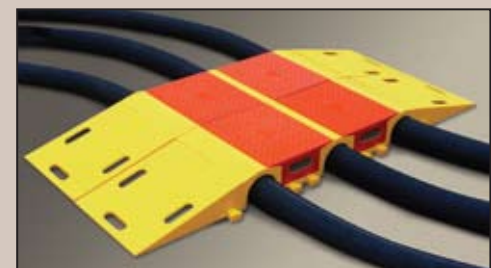

Three tunnel system

WARNING!

- ▶ Vehicles crossing bridge system must have clearance of greater than bridge height.
- ▶ Cable/Hose Bridges are for rubber tired vehicles only and not for equipment with metal tracks.

SPECIFICATION DATA

Material..... Polyurethane (UV Stabilized)
Operating Temp..... -40°F to 120°F (-40°C to 48°C)

LOAD CAPACITY

Model No.	Min. Footprint		Max Load Per Tire
	in.	mm	
UHB2025	7 x 7 in.	(178 x 178 mm)	23,700 lbs. (10,750 kg)
UHB3035	7 x 7 in.	(178 x 178 mm)	19,800 lbs. (8,981 kg)
UHB4045	7 x 7 in.	(178 x 178 mm)	19,300 lbs. (8,754 kg)
UHB5060	7 x 7 in.	(178 x 178 mm)	17,100 lbs. (7,757 kg)