




OFF-ROAD URETHANE WHEEL CHOCKS



All Monster Chocks feature a large, easy access, open-top, recessed scoop handle design for ease of use with gloved hand. This design prevents moisture, dirt and debris from collecting in the handle recess area.


MODEL 1911 - Recommended for Wheels Over 105" Diameter

| MODEL | DESCRIPTION | COLOR | A LENGTH | B WIDTH | C HEIGHT | WEIGHT |
|--------|--|--------|----------------------|----------------------|--------------------|----------------------|
| MC1911 | For Mine Haul Trucks with Tire Sizes over 105" (2667 mm) Diameter and Load Capacities up to 400 tons; Tall Chock Design for Unusually Steep Haul Road Grades | Yellow | 24.6 in. (625 mm) | 14.5 in. (369 mm) | 16 in. (407 mm) | 42 lbs. (19.1 kg) |

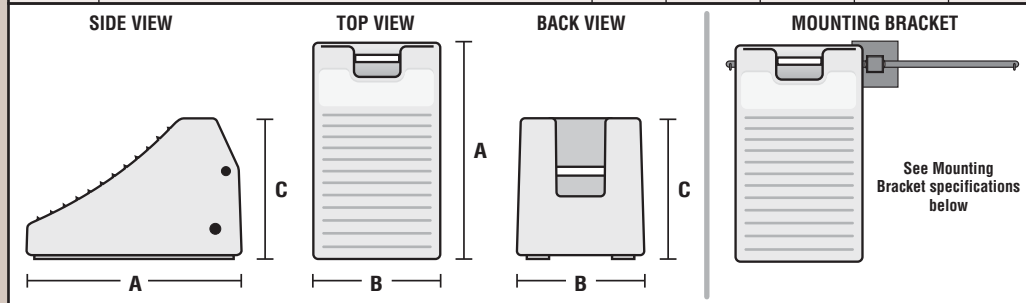

MODEL 1912 - Recommended for Wheels Over 105" Diameter

| MODEL | DESCRIPTION | COLOR | A LENGTH | B WIDTH | C HEIGHT | WEIGHT |
|--------|--|--------|----------------------|----------------------|----------------------|----------------------|
| MC1912 | For Mine Haul Trucks with Tire Sizes over 105" (2667 mm) Diameter and Load Capacities up to 240 tons; Chock Design for Normal Haul Road Grades | Yellow | 21.9 in. (557 mm) | 14.9 in. (379 mm) | 10.6 in. (270 mm) | 39 lbs. (17.7 kg) |

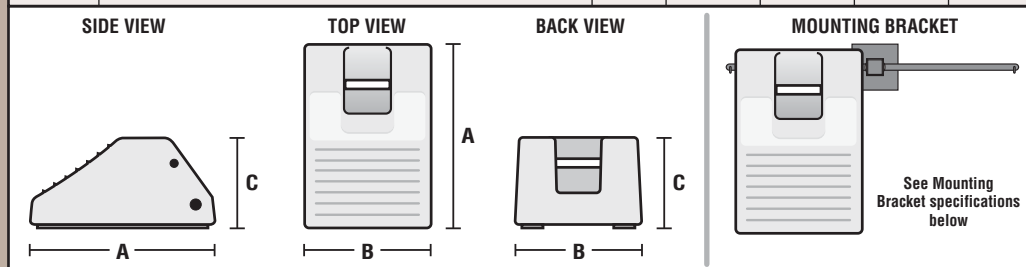

MOUNTING BRACKET FOR ALL 1900 SERIES WHEEL CHOCKS

| MODEL | DESCRIPTION | SPECIFICATIONS | WEIGHT |
|--------|--|--|---------------------|
| MC1900 | Universal Dual Mount Bracket holds 2 each 1900 Series Wheel Chocks of any size - Primer Finish <i>Mounting Hardware NOT Included.</i> | 36" (914 mm) Length Bracket Rod with 6" (152 mm) x 6" (152 mm) Mounting Plate | 16 lbs. (7.3 kg) |

WARNING!

Please refer to Wheel Chock User Guidelines on Page 6.