WHEEL CHOCKS

5500 SERIES - TRIANGULAR DESIGN USED FOR AIRCRAFT WORLDWIDE

These high-density rubber chocks are weather resistant, maintenance free, and feature heavy duty horizontal traction ribs that flex and provide greater grip as pressure is applied. Either side of chock can be positioned against tire. Standard with 24 in. (610 mm) replaceable nylon rope lanyard.

	and and that I in (or o thin) replaced to hyten repertany and								
MODEL	DESCRIPTION	COLOR	A LENGTH	B Width	C HEIGHT	WEIGHT SINGLE			
RC5510	Wheel Chock	Black	10 in. (254 mm)	5 in. (127 mm)	5 in. (127 mm)	6.5 lbs. (3.0 kg)			
RC5512	Wheel Chock	Black	12 in. (305 mm)	5 in. (127 mm)	5 in. (127 mm)	7.7 lbs. (3.5 kg)			
RC5515	Wheel Chock	Black	15 in. (381 mm)	5 in. (127 mm)	5 in. (127 mm)	9.3 lbs. (4.2 kg)			
RC5518	Wheel Chock	Black	18 in. (457 mm)	5 in. (127 mm)	5 in. (127 mm)	11 lbs. (5.0 kg)			
RC5521	Wheel Chock	Black	21 in. (533 mm)	5 in. (127 mm)	5 in. (127 mm)	12.7 lbs. (5.8 kg)			
RC5524	Wheel Chock	Black	24 in. (610 mm)	5 in. (127 mm)	5 in. (127 mm)	14.4 lbs. (6.5 kg)			
	TOP VIEV	V		END VIEW					
	B C C								

Please specify after Model No.: S = Single • P = Pair






ROADBLOCKS™ Urethane Wheel Chocks are strong, safe, and lightweight. Impact-absorbing chocks grip tire and road, will not cause tire or pavement damage, and are oil and chemical resistant. For added safety and convenience, all Checkers' urethane wheel chocks feature "How to Use" guidelines molded into each chock.

1200 SERIES - DESIGNED FOR THE MINING AND CONSTRUCTION INDUSTRIES

Rated for haul trucks with tire sizes up to 105 in. (2667 mm) diameter and load capacity up to 120 tons.

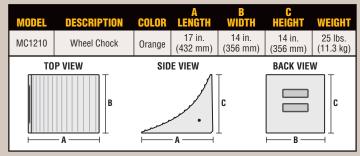

MOUNTING BRACKET FOR 1200 SERIES

MODEL	DESCRIPTION	SPECIFICATIONS	WEIGHT
MC1900	Universal Dual Mount Bracket Holds 2 each 1200 Series Chocks - Primer Finish Mounting Hardware NOT Included.	36" (914 mm) Length Bracket Rod with 6" (152 mm) x 6" (152 mm) Mounting Plate	16 lbs. (7.3 kg)

