

SUPER-CROSS™

EXTREME CABLE PROTECTORS

SUPER-CROSS™ Extreme Crossover Pads provide protection for electrical cables used in mining and construction. Durable urethane construction withstands thousands of pounds of weight and endures constant pounding, impact and abrasion caused by haul trucks and falling rocks. Extensively tested and proven to be oil, chemical, abrasion, cut/tear and temperature resistant. Pads feature molded-in receptacles for tow chain attachment. Crossover sections can be fastened together for any length required. The use of crossover pads greatly improves safety and eliminates the cost and labor of burying, rerouting, or stringing cables overhead.


MODEL	DESCR.	COLOR	A LENGTH	B WIDTH	C HEIGHT	D-STEP HEIGHT	E-SLOT SIZE	WEIGHT
XO118-2	Type 1	Orange	24 in. (610 mm)	18 in. (457 mm)	4.5 in. (114 mm)	1 in. (25 mm)	2.5 in. (64 mm)	37 lbs. (16.8 kg)
XO218-2	Type 2	Orange	24 in. (610 mm)	18 in. (457 mm)	4.5 in. (114 mm)	1 in. (25 mm)	3.0 in. (76 mm)	37 lbs. (16.8 kg)
XO342-10	Type 3	Orange	120 in. (3048 mm)	42 in. (1067 mm)	7 in. (178 mm)	.75 in. (19 mm)	3.5 in. (89 mm)	852 lbs. (386.5 kg)
XO342-CS-10	Closure Strip	Orange	120 in. (3048 mm)	3.43 in. (87 mm)	3.3 in. (84 mm)	N/A	N/A	50 lbs. (22.7 kg)
XO436-8	Type 4	Orange	96 in. (2438 mm)	36 in. (914 mm)	5 in. (127 mm)	.75 in. (19 mm)	3.25 in. (83 mm)	415 lbs. (188.2 kg)
XO436-CS-8	Closure Strip	Orange	96 in. (2438 mm)	3.25 in. (83 mm)	3.375 in. (86 mm)	N/A	N/A	44 lbs. (20 kg)
XO436-10	Type 4	Orange	120 in. (3048 mm)	36 in. (914 mm)	5 in. (127 mm)	.75 in. (19 mm)	3.25 in. (83 mm)	518 lbs. (235 kg)
XO436-CS-10	Closure Strip	Orange	120 in. (3048 mm)	3.25 in. (83 mm)	3.375 in. (86 mm)	N/A	N/A	55 lbs. (25 kg)
XO442-8	Type 4	Orange	96 in. (2438 mm)	42 in. (1067 mm)	7 in. (178 mm)	.75 in. (19 mm)	4.5 in. (114 mm)	610 lbs. (277 kg)
XO442-CS-8	Closure Strip	Orange	96 in. (2438 mm)	4.5 in. (114 mm)	5.375 in. (137 mm)	N/A	N/A	84 lbs. (38.2 kg)
XO442-10	Type 4	Orange	120 in. (3048 mm)	42 in. (1067 mm)	7 in. (178 mm)	.75 in. (19 mm)	4.5 in. (114 mm)	762 lbs. (346 kg)
XO442-CS-10	Closure Strip	Orange	120 in. (3048 mm)	4.5 in. (114 mm)	5.375 in. (137 mm)	N/A	N/A	105 lbs. (47.6 kg)

Please specify Operating Temperature Requirements when ordering.

WARNING! Crossover Pads are for rubber tired vehicles only and not for equipment with metal tracks.

NOTE: Please make your product selection carefully. Extreme Crossover Systems are non-returnable.

EXTREME CROSSOVER SYSTEMS

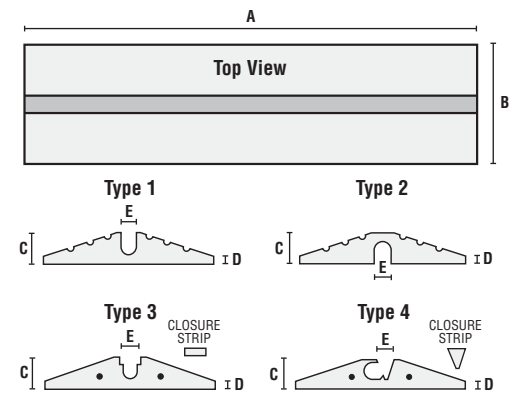

NOTE: CLOSURE STRIPS MUST BE ORDERED SEPARATELY.

TYPE 1 & 2: Feature molded-in hand holds for ease of placement.


TYPE 3 & 4: Features 2 each molded through 1 in. (245 mm) holes for fastening together multiple pad sections using wire rope.

SUPER-CROSS™

UTILITY CABLE PROTECTORS

SUPER-CROSS™ Utility Crossover Systems provide protection for valuable cables and hoses, while ensuring a method of safe passage for vehicle traffic. These lightweight and portable crossovers are manufactured from durable polyurethane and are ideal during maintenance operations or in emergency situations. Complete with carrying handle for easy positioning. Two tunnel sizes available.

MODEL	COLOR	A-LENGTH	B-WIDTH	C-HEIGHT	D-TUNNEL SIZE	WEIGHT
COP2200-3	Yellow	18 in. (457 mm)	30 in. (762 mm)	5 in. (127 mm)	3 in. (76 mm)	35 lbs. (15.9 kg)
COP2200-4.5	Yellow	18 in. (457 mm)	30 in. (762 mm)	6 in. (152 mm)	4.5 in. (114 mm)	35 lbs. (15.9 kg)

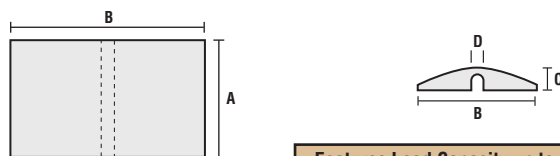

Features Load Capacity up to 4,000 lbs. Per Tire.

UTILITY CROSSOVER SYSTEMS



FEATURES

- Polyurethane Construction
- Convenient Carrying Handles
- Two Tunnel Sizes Available
- Lightweight & Portable

WARNING! Crossover Pads are for rubber tired vehicles only and not for equipment with metal tracks.