




GP

# HEAVY DUTY GENERAL PURPOSE 5 CHANNEL SYSTEMS

Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic. Compact design is ideal for use in amusement parks, entertainment venues, for easy sporting events, and in most public, commercial, industrial, construction, and utility applications. cable placement


## LINEBACKER® GP-5 5 CHANNEL PROTECTOR WITH " T" CONNECTORS

MODEL	DESCRIPTION	A LENGTH	B WIDTH	C HEIGHT	D-CHAN. WIDTH	E-CHAN. HEIGHT	WEIGHT
CP5X125-GP	5-Channel Protector	36 in. (914.4 mm)	17.25 in. (438.2 mm)	1.95 in. (50 mm)	1.3 in. (33 mm)	1.3 in. (33 mm)	22 lbs. (10.0 kg)
CPEC5X125-GP (Pair only)	5-Channel End Caps (female) (male)	4.75 in. (120.7 mm)	17.25 in. (438.2 mm)	1.95 in. (50 mm)	1.3 in. (33 mm)	1.3 in. (33 mm)	2.7 lbs. (1.2 kg)
		4.75 in. (120.7 mm)	17.25 in. (438.2 mm)	1.95 in. (50 mm)	1.3 in. (33 mm)	1.3 in. (33 mm)	2.7 lbs. (1.2 kg)
CPY5X125-GP	5-Channel "Y" Protector	19.75 in. (501.7 mm)	17.25 in. (438.2 mm)	1.95 in. (50 mm)	1.3 in. (33 mm)	1.3 in. (33 mm)	9.4 lbs. (4.3 kg)

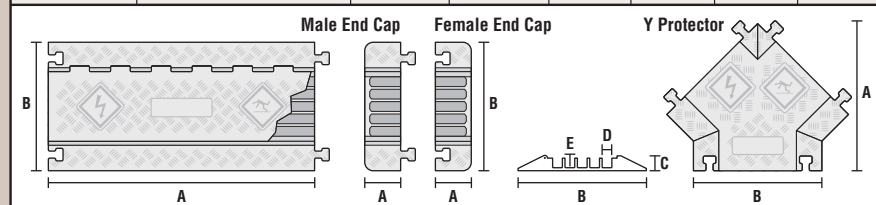

Protector Color: O/Y = Orange Lid with Yellow Ramps • O/B = Orange Lid with Black Ramps • B/B = Black Lid with Black Ramps  
End Cap Color: Orange • Y Protector Color: O/Y = Orange Lid with Yellow Ramps • O/B = Orange Lid with Black Ramps

<b>SPECIFICATION DATA</b>	<b>LOAD CAPACITY PER TIRE/AXLE</b>	<p>Safety Warning Symbols Molded into Lid</p> <p>See Page 21 for ADA Compliant Ramps</p>
Material.....Polyurethane (UV stabilized) Operating Temp.....-40 F to 120 F (-40 C to 48 C) Hinge Pin Material.....Reinforced fiberglass Safety Symbols.....Per ANSI. Z535.3-1991	Channels Max Load 70°F (21°C) 5 .....10,500 lbs./Tire (4768 kg) 21,000 lbs./Axle (9528 kg)	

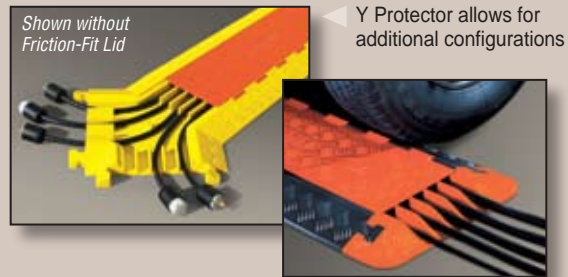

Linebacker® GP 5 Channel - protects cable and hose lines up to 1.3 in. outside diameter

**ACCESSORIES**  
for Linebacker® GP Cable Protectors  
**SEE PAGES 19, 20, 21 & 22!**



GP


# HEAVY DUTY GENERAL PURPOSE 1 CHANNEL SYSTEMS

Single Channel Systems protect valuable electrical cables, cords and hose lines from vehicle and foot traffic. Small, compact, low profile design allows for ease of storage and transport to job site. Popular with many utility, construction, and maintenance companies. Ideal for temporary re-routing of single cable and hose lines including fragile fiber optic telecommunications cable.


## LINEBACKER® GP-1 1 CHANNEL PROTECTOR WITH " T" CONNECTORS

MODEL	DESCRIPTION	A LENGTH	B WIDTH	C HEIGHT	D-CHAN. WIDTH	WEIGHT
<b>1.25" CHANNEL OPTIONS</b>						
CP1X125-GP	1-Channel Protector - Open Top	36 in. (914.4 mm)	11.5 in. (292.1 mm)	1.6 in. (40.6 mm)	1.25 in. (31.8 mm)	13 lbs. (5.9 kg)
CP1X125-GP-DO	1-Channel Protector - Drop Over	36 in. (914.4 mm)	11.5 in. (292.1 mm)	1.6 in. (40.6 mm)	1.25 in. (31.8 mm)	13 lbs. (5.9 kg)

MODEL	DESCRIPTION	A LENGTH	B WIDTH	C HEIGHT	D-CHAN. WIDTH	WEIGHT
<b>2.25" CHANNEL OPTIONS</b>						
CP1X225-GP	1-Channel Protector - Open Top	36 in. (914.4 mm)	14.25 in. (361.9 mm)	3 in. (76.2 mm)	2.25 in. (57.2 mm)	19 lbs. (8.6 kg)
CP1X225-GP-DO	1-Channel Protector - Drop Over	36 in. (914.4 mm)	14.25 in. (361.9 mm)	3 in. (76.2 mm)	2.25 in. (57.2 mm)	19 lbs. (8.6 kg)

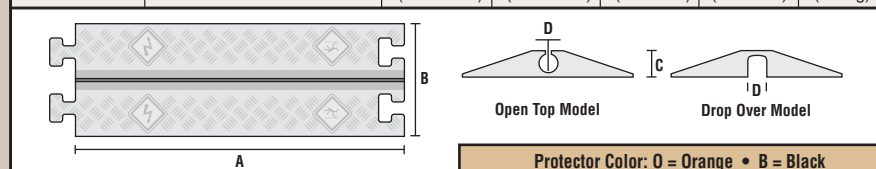

<b>SPECIFICATION DATA</b>	<b>LOAD CAPACITY PER TIRE/AXLE</b>	<p>Safety Warning Symbols Molded into Protector</p> <p>See Page 21 for ADA Compliant Ramps</p>
Material.....Polyurethane (UV stabilized) Operating Temp.....-40 F to 120 F (-40 C to 48 C) Safety Symbols.....Per ANSI. Z535.3-1991	Chan. Size Max Load 70°F (21°C) 1.25" .....11,700 lbs./Tire (5,307 kg) 23,400 lbs./Axle (10,614 kg) 2.25" .....8,500 lbs./Tire (3,856 kg) 17,000 lbs./Axle (7,711 kg)	

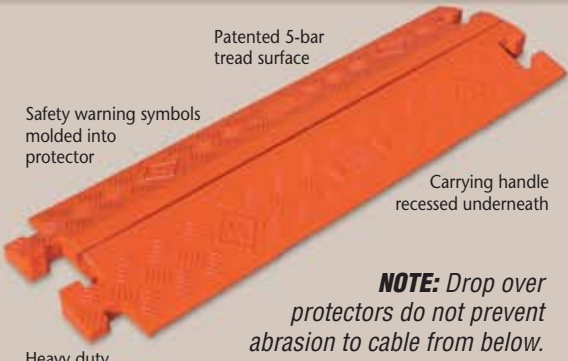

Linebacker® GP 1 Channel - protects cable and hose lines up to 2.25 in. outside diameter