




**LINEBACKER®**  
CABLE PROTECTORS

**HD**

**EXTRA HEAVY DUTY**  
**2, 3, 4, 5 CHANNEL SYSTEMS**

Protect valuable electrical cables, cords and hoses from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic. Ideal for heavy trucks and forklifts in industrial environments, such as construction sites, where extra heavy duty cable protection is required due to constant heavy truck and vehicle traffic.

Hinged lid makes placing and removing cables and hose lines easy

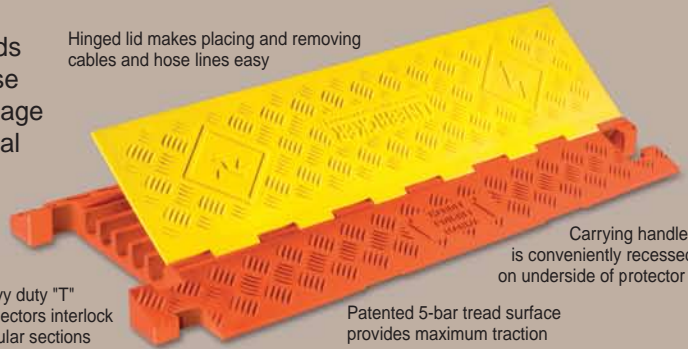

Heavy duty "T" connectors interlock modular sections

Patented 5-bar tread surface provides maximum traction


Carrying handle is conveniently recessed on underside of protector

- All weather polyurethane construction with heavy load capacity
- Non-metallic protectors insulate cables/hose lines from human contact
- Satisfies state/federal regulatory agencies
- Multiple channels and sizes for various cable/hose line diameters
- Hinged lift cover makes placing and removing cable/hose lines easy
- Modular interlocking design is lightweight and easy to transport, set-up, disassemble and store




Linebacker® on Duty

**THE BEST DEFENSE IN CABLE PROTECTION**

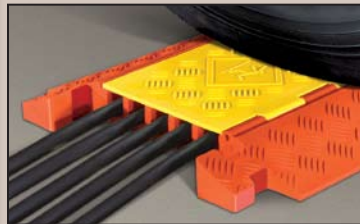

Linebacker® HD 4 & 5 Channel - protects cable and hose lines up to 1.25 in. outside diameter

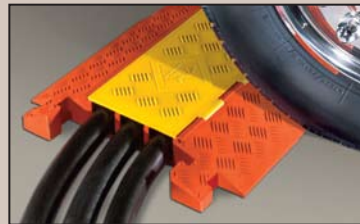

Linebacker® HD 3 Channel - protects cable and hose lines up to 2.25 in. outside diameter




Linebacker® HD 2 Channel - protects cable and hose lines up to 3.25 in. outside diameter

**ACCESSORIES**  
for Linebacker® HD Cable Protectors  
**SEE PAGES 20, 21 & 22!**

**LINEBACKER® HD PROTECTORS WITH "T" CONNECTORS**

MODEL	DESCRIPTION	A-LENGTH	B-WIDTH	C-HEIGHT	D-CHANNEL WIDTH	E-CHANNEL HEIGHT	WEIGHT	
<b>5 CHANNEL PROTECTORS</b>								
CP5X125	5 Channel Protector	36 in. (914.4 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.25 in. (31.8 mm)	1.25 in. (31.8 mm)	25 lbs. (11.3 kg)	
CPEC5X125 (Pair only)	5 Channel End Caps (female/male)	7.5 in. (190.5 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.25 in. (31.8 mm)	1.25 in. (31.8 mm)	3.5 lbs. (1.6 kg)	
		5.25 in. (133.4 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.25 in. (31.8 mm)	1.25 in. (31.8 mm)	3.5 lbs. (1.6 kg)	
CPT5X125-R	5 Channel 45 Right Turn	25 in. (635 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.25 in. (31.8 mm)	1.25 in. (31.8 mm)	13 lbs. (5.9 kg)	
CPT5X125-L	5 Channel 45 Left Turn	25 in. (635 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.25 in. (31.8 mm)	1.25 in. (31.8 mm)	13 lbs. (5.9 kg)	
<b>4 CHANNEL PROTECTORS</b>								
CP4X125	4 Channel Protector	36 in. (914.4 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.85 in. (47.1 mm)	1.25 in. (31.8 mm)	26 lbs. (11.8 kg)	
CPEC4X125 (Pair only)	4 Channel End Caps (female/male)	7.5 in. (190.5 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.85 in. (47.1 mm)	1.25 in. (31.8 mm)	3.5 lbs. (1.6 kg)	
		5.25 in. (133.4 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.85 in. (47.1 mm)	1.25 in. (31.8 mm)	3.5 lbs. (1.6 kg)	
CPT4X125-R	4 Channel 45 Right Turn	25 in. (635 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.85 in. (47.1 mm)	1.25 in. (31.8 mm)	13 lbs. (5.9 kg)	
CPT4X125-L	4 Channel 45 Left Turn	25 in. (635 mm)	20 in. (508 mm)	2.31 in. (57.2 mm)	1.85 in. (47.1 mm)	1.25 in. (31.8 mm)	13 lbs. (5.9 kg)	
<b>3 CHANNEL PROTECTORS</b>								
CP3X225	3 Channel Protector	36 in. (914.4 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	28 lbs. (12.7 kg)	
CPEC3X225 (Pair only)	3 Channel End Caps (female/male)	8.25 in. (209.6 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	4 lbs. (1.8 kg)	
		6.0 in. (152.4 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	4 lbs. (1.8 kg)	
CPT3X225-R	3 Channel 45 Right Turn	25 in. (635 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	15 lbs. (6.8 kg)	
CPT3X225-L	3 Channel 45 Left Turn	25 in. (635 mm)	20 in. (508 mm)	3.05 in. (77.5 mm)	2.25 in. (57.2 mm)	2.25 in. (57.2 mm)	15 lbs. (6.8 kg)	
<b>2 CHANNEL PROTECTORS</b>								
CP2X325	2 Channel Protector	36 in. (914.4 mm)	22 in. (558.8 mm)	4.13 in. (101.6 mm)	3.25 in. (82.6 mm)	3.25 in. (82.6 mm)	33 lbs. (15.0 kg)	

\*Note: One channel on these protectors is 1.54 in. wide (39.2 mm)

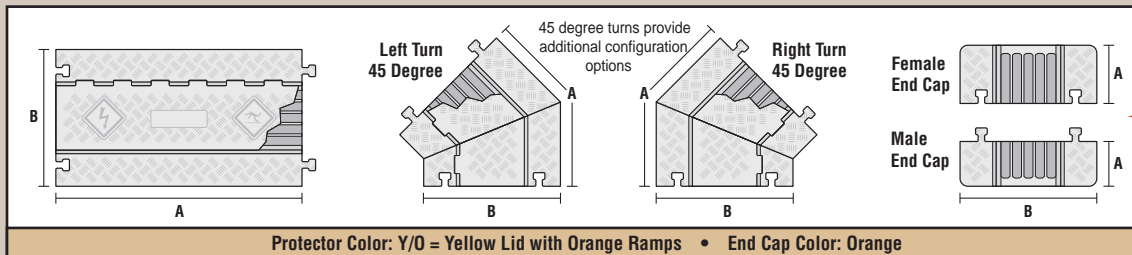

Protector Color: Y/O = Yellow Lid with Orange Ramps • End Cap Color: Orange

Illustrations shown here are for the 5 channel protection system components. The 4, 3, and 2 channel components look identical - they just have fewer channels with different sizes.

SPECIFICATION DATA		LOAD CAPACITY PER TIRE/AXLE			
Material.....	Polyurethane (UV stabilized)	Channels	Max Load 70°F (21°C)		
Operating Temp.....	-40 F to 120 F (-40 C to 48 C)	5	20,150 lbs/Tire (9,140 kg) / 40,300 lbs/Axle (18,286 kg)		
Hinge Pin Material.....	Reinforced fiberglass	4	20,150 lbs/Tire (9,140 kg) / 40,300 lbs/Axle (18,286 kg)		
Safety Symbols.....	Per ANSI. Z535.3-1991	3	14,210 lbs/Tire (6,446 kg) / 28,420 lbs/Axle (12,889 kg)		
		2	10,880 lbs/Tire (4,935 kg) / 21,760 lbs/Axle (9,870 kg)		