



# 5-CHANNEL HEAVY DUTY


System features Dog Bone Connectors

## FEATURES

- Protects cables and hoses up to 1.0" outside dia.
- The "original" cable protector
- Dog Bone Connectors to extend to any desired length
- Thick lid and base allow for high volume of traffic
- Hinged lid for easy cable placement
- Modular interlocking design



"Dog Bone" Connector

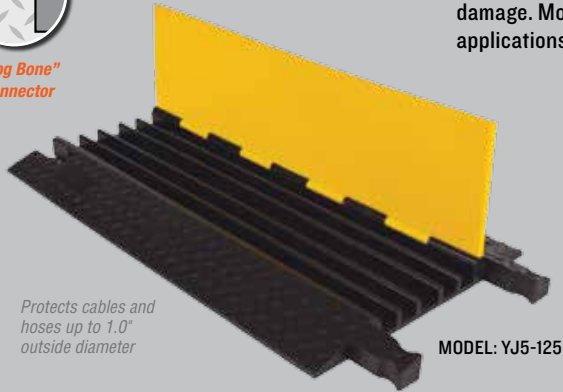

Protects cables and hoses up to 1.0" outside diameter

YELLOW JACKET® 5-CHANNEL CABLE PROTECTOR with hinged lid provides a safe crossing in high volume traffic areas while protecting valuable electrical cables and hose lines from damage. Modular interlocking design is ideal for use in industrial, commercial, and public applications.

MODEL: YJ5-125

### Lid/Base Color Options





### LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)

32,600 lb./Axle (14,787 kg)




\*NOTE: Center channel width is 1.65 in. (4.19 cm)

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
YJ5-125	36 in. (91.4 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.375 in. (3.49 cm)	1 in. (2.54 cm)	28.2 lb. (12.8 kg)


## ACCESSORIES for Yellow Jacket 5-Channel Heavy Duty Cable Protectors

### 45° LEFT TURN MODEL: YJ5TL-125






Turns Color:  
Y/B = Yellow Lid with Black Ramps

### 45° RIGHT TURN MODEL: YJ5TR-125



Join left and right turns to create a jog


### END CAPS (Pair Only) MODEL: YJ5EB-125



\*NOTE: Center channel width is 1.65 in. (4.19 cm)

End Caps Color: Y = Yellow

### 90° 4-WAY CROSS MODEL: YJ5X-125 (Split or join cable runs)



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH*	E: CHANNEL HEIGHT	WEIGHT
45° LEFT TURN	YJ5TL-125	24 in. (61 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.325 in. (3.37 cm)	14.2 lb. (6.4 kg)
45° RIGHT TURN	YJ5TR-125	24 in. (61 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.325 in. (3.37 cm)	14.2 lb. (6.4 kg)
END CAPS (PAIR)	YJ5EB-125	Female: 7.375 in. (18.7 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.25 in. (3.18 cm)	1.125 in. (2.86 cm)	4.05 lb. (1.8 kg)
		Male: 4.25 in. (10.8 cm)					
90° 4-WAY CROSS	YJ5X-125	A= 28.5 in. (72.4 cm) A2= 24.5 in. (62.2 cm)	19.75 in. (50.2 cm)	1.875 in. (4.76 cm)	1.339 in. (3.4 cm)	1.325 in. (3.37 cm)	23.1 lb. (10.5 kg)

## AMS® ACCESSIBILITY RAMPS for Yellow Jacket 5-Channel Heavy Duty Cable Protectors

CHECKERS 5-CHANNEL AMS® (Advanced Modular System) ACCESSIBILITY RAMPS feature a gradual slope and slip-resistant surface to ensure a safe crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each Checkers' Accessibility Ramp system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA Compliant

Features patented design and "Hourglass" connector system (with adapter for Dog Bone connector system)



Channel height x width for AMS Center Section and Interconnect is 1.25 in. x 1.375 in.

Ramps: Yellow

Side Ramps: Blue

AMS and Interconnect:

Yellow lid with black base

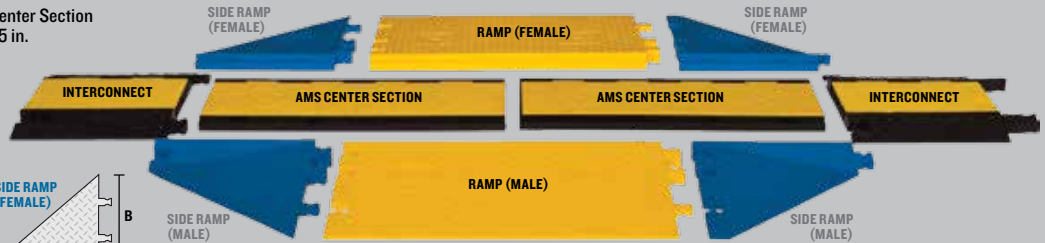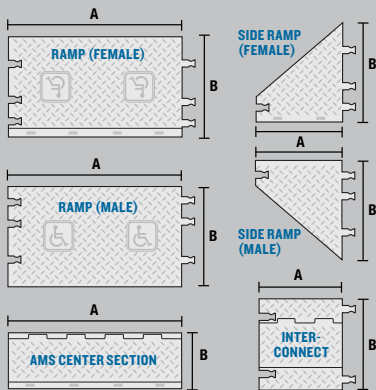

\*NOTE: Interconnects can connect to Guard Dog or Yellow Jacket 5-Channel

	MODEL	A: LENGTH	B: WIDTH	HEIGHT	WEIGHT
RAMP (FEMALE)	WSA-125-RFAH-DY	36 in. (91.44 cm)	20.38 in. (51.75 cm)	1.875 in. (4.76 cm)	26 lb. (11.8 kg)
RAMP (MALE)	WSA-125-RMAH-DY	36 in. (91.44 cm)	20 in. (50.8 cm)	1.875 in. (4.76 cm)	24.85 lb. (11.3 kg)
SIDE RAMPS (FEMALE)	WSA-125-BFF-BLU	17.75 in. (45.09 cm)	20.5 in. (52.07 cm)	1.875 in. (4.76 cm)	16.8 lb. (7.6 kg)
SIDE RAMPS (MALE)	WSA-125-BFM-BLU	17.75 in. (45.09 cm)	20.5 in. (52.07 cm)	1.875 in. (4.76 cm)	18.9 lb. (8.6 kg)
AMS CENTER SECTION	YJ5-125-AMS-CTR	36 in. (91.44 cm)	11.75 in. (29.85 cm)	1.875 in. (4.76 cm)	16.7 lb. (7.6 kg)
INTERCONNECT*	YJ5I-125	17.88 in. (45.4 cm)	19.75 in. (50.17 cm)	1.875 in. (4.76 cm)	M: 16 lb. (7.3 kg) F: 15.6 lb. (7.1 kg)

## AMS® ACCESSIBILITY RAMP KITS for Yellow Jacket 5-Channel Heavy Duty Cable Protectors



### KIT 1

KIT 1 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections
- 2 Interconnects\*


\*NOTE: Interconnects can connect to Guard Dog or Yellow Jacket 5-Channel

### LOAD CAPACITY

Max load tested at 70°F (21°C)

16,300 lb./Tire (7,393 kg)  
32,600 lb./Axle (14,787 kg)

	MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
AMS KIT 1	WSA-125-KIT1-HS	111.13 in. (228.3 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	151.5 lb. (68.7 kg)

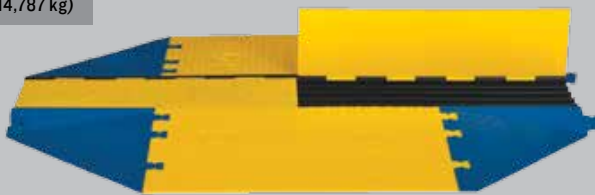

### KIT 2

KIT 2 - includes:

- 2 Ramps
- 4 Blue Side Ramps
- 2 AMS Center Sections

	MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
AMS KIT 2	WSA-125-KIT2-HS	75.38 in. (191.5 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	101 lb. (45.8 kg)



### KIT 3

KIT 3 - includes:

- 2 Ramps
- 1 AMS Center Section

	MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT
AMS KIT 3	WSA-125-KIT3-HS	36 in. (91.44 cm)	51.25 in. (130.2 cm)	1.875 in. (4.76 cm)	67.5 lb. (30.6 kg)